


Basic duct cable with multitube structure and fiberglass yarn reinforcement BDC-DI

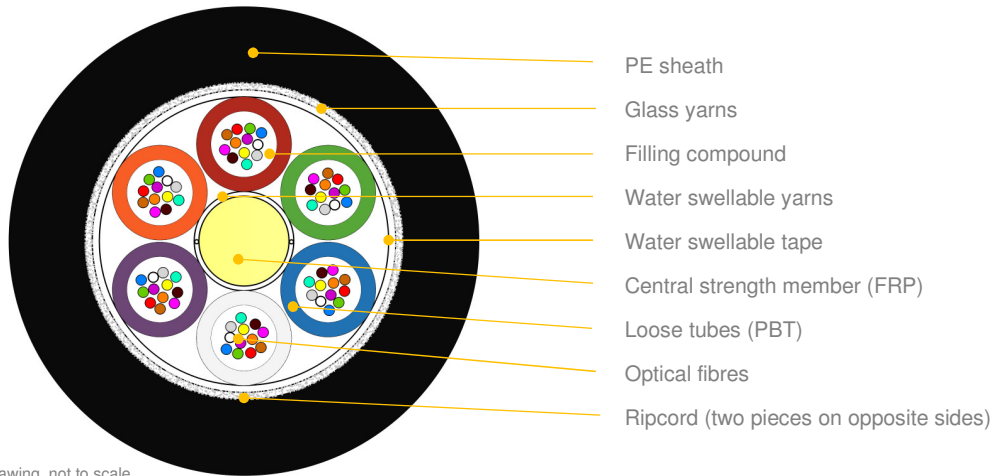

*schematic drawing, not to scale

APPLICATION:

For installation by blowing or pulling into existing duct
Fully dielectric cable
Basic rodent protection

DESIGN:

FRP strength and anti-buckling element
Dry yarns and tape to prevent moisture into the cable
Loose tube (PBT Ø 2.5mm) with filling compound
Optical fibres
Fillers (if applicable)
Water-swellable tape
Fibreglass yarns as strain relief
UV stabilized PE sheath (nominal thickness 1,6mm)
Sheath options: LSOH, PA etc.

CONFIGURATIONS:

Variant	Quantity [pcs]				Ø nominal (±5%) [mm]	Nominal weight (±10%) [kg/km]	Max short term tensile load [N]	Max long term tensile load [N]
	Fibres	Fibres per tube	Total elements	Active tubes				
1-6T x 6F	6-36	6	6	1-6	11,5	98	3400	2400
1-6T x 12F	12-72	12	6	1-6	11,5	99	3000	1900
8T x 12F	96	12	8	8	13,1	126	3000	1900
12T x 12F	144	12	12	12	16,2	193	3000	1900
16T x 12F	192	12	18	16	17,0	195	3000	1900
18T x 12F	216	12	18	18	17,0	197	3000	1900
20T x 12F	240	12	24	20	18,4	252	3000	1900
24T x 12F	288	12	24	24	18,4	260	3000	1900
16T x 24F	384	24	18	16	17,0	208	3000	1500
18T x 24F	432	24	18	18	17,0	210	3000	1500
24T x 24F	576	24	24	24	18,4	265	3000	1500
36T x 24F	864	24	36	36	21,7 (-0,6mm/+1,1mm)	240	3000	1500

Other designs on demand

MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

Crush performance:	4000 [N/10 cm]	IEC 60794-1-21-E3, $\Delta\alpha\leq 0,1$ dB, reversible
Bending radius:	Static: 15 x D Dynamic: 20 x D	IEC 60794-1-21-E6, $\Delta\alpha\leq 0,05$ dB, reversible
Water penetration:	3[m] sample, 1[m] head, 24[h]	IEC 60794-1-22-F5, no leakage
Temperature range		IEC 60794-1-22-F1, $\Delta\alpha\leq 0,05$ dB/km
Installation:	-15... +55 [°C]	
Operation:	-40... +70 [°C]	
Transport & Storage:	-40... +70 [°C]	

Type:	BDC-DI	REV: 0
Issued:	27/09/2021	KP
Project:	079-21	

OPTICAL FIBRE AND LOOSE TUBES COLOUR IDENTIFICATION

For optical fibres and loose tube identification information please see DSH_Colors_CODE_XXXX document.

FIBRE PARAMETERS

For selected post-production optical fibres parameters please see DSH_OFP document.

MARKING

The following print (hot stamped, laser printing or other suitable method) is applied at 1-meter intervals:

Example: MAV Zrt. <YEAR OF MANUFACTURE> FIBRAIN BDC-D04 Fve 8T X 12F BR SM LWP 9127 <LENGTH MARKING>

The accuracy of marking is $\pm 0,5\%$. Remarking is in accordance with Bellcore GR 20 and supersedes earlier markings. Occasional loss of marking is possible. Cables can be supplied with a range of single mode or multimode fibres and customized print.

PACKING


Cables will be shipped on disposable wooden or treated wooden drums. Both ends of the cable will be capped and accessible for testing. Rotation direction arrow will be marked on the drum together with identification information.

DELIVERY LENGTH


2000 – 8000 meters $\pm 5\%$ depending on fibre count, with possibility of supplying up to 5% of total contract quantity as short length cables which should be above 1000 meters long. Tolerance of 5 % of order quantity shall be allowed.

ANNEX – DRAWINGS:


6 Elements Cable



8 Elements Cable



12 Elements Cable

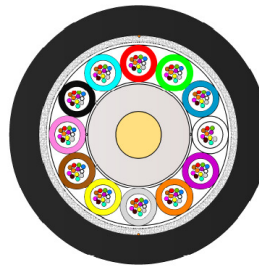

24 Elements Cable



*schematic drawing, not to scale

This document and the statements contained in it are not intended for customers within the meaning of the Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot, in any case, be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.