


Type:	DDC-C0 XX	REV: 3.6
Issued:	06/08/2015	PB
Modified:	01/10/2021	KP

Double jacket duct cable with multitube structure with glass yarns reinforcement DDC C0

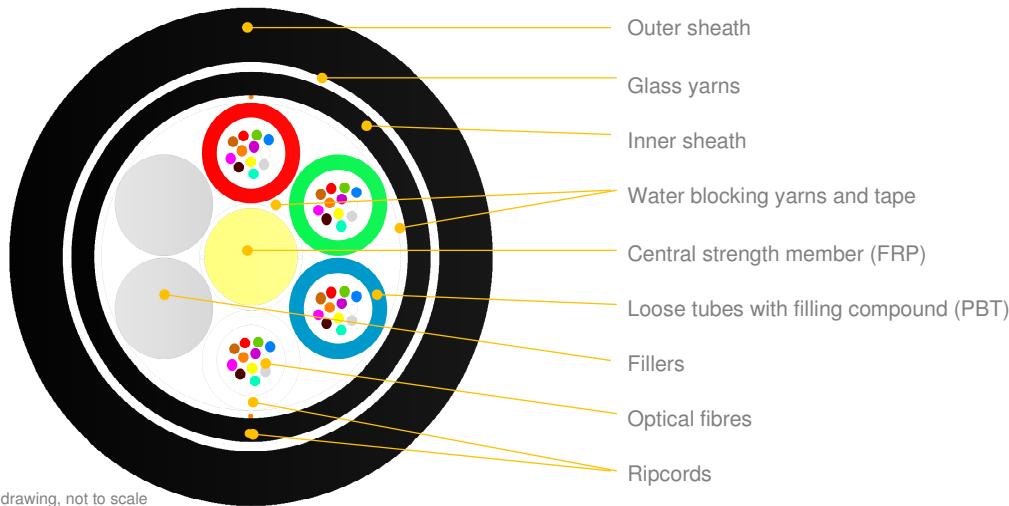

*schematic drawing, not to scale

APPLICATION:

For installation into existing duct or directly buried.
Fully dielectric cable

STRUCTURE AND COMPOSITION:

FRP strength and anti-buckling element
Optical fibres
Loose tube with filling compound (PBT Ø 2.0mm)
Dry yarns and tape to prevent moisture into the cable
Glass yarns as tensile elements
Double PE sheath
Outer sheath options: LSOH, PA etc.

CABLE DESIGNS:

Variant	Quantity [pcs]				Ø nominal (±5%)	Nominal weight (±10%)	Max allowed tension	Max static tension
	Fibres	Fibres per tube	Total elements	Active tubes				
	[mm]	[kg/km]	[N]	[N]				
48F G.652D 3Tx12F + 3Tx4F	48	12 / 4	6	1-6	11.7	103	3500	1600
Other construction available on demand								

MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

Crush performance:	3500 [N/10 cm]	IEC 60794-1-21-E3, $\Delta\alpha \leq 0,05$ dB, reversible
Bending performance:	15 x D (10 cycles)	IEC 60794-1-21-E6, $\Delta\alpha \leq 0,05$ dB, reversible
Temperature range:		IEC 60794-1-22-F1, $\Delta\alpha \leq 0,05$ dB/km, reversible
Installation	-15... +55 [°C]	
Operation	-40... +70 [°C]	
Transport & Storage	-40... +70 [°C]	
Water penetration:	3[m] sample, 1[m] head, 24[h]	IEC 60794-1-22-F5B, no leakage

OPTICAL FIBRES AND LOOSE TUBES COLOUR IDENTIFICATION

Fibre N.o.	1	2	3	4	5	6	7	8	9	10	11	12
Tube 1	Red	Green	Blue	White	Violet	Orange	Grey	Yellow	Brown	Pink	Black	Aqua
Tube 2	Red	Green	Blue	White	Violet	Orange	Grey	Yellow	Brown	Pink	Black	Aqua
Tube 3	Red	Green	Blue	White	Violet	Orange	Grey	Yellow	Brown	Pink	Black	Aqua
Tube 4	Red	Green	Blue	White								
Tube 5	Red	Green	Blue	White								
Tube 6	Red	Green	Blue	White								

Type:	DDC-C0 XX	REV: 3.6
Issued:	06/08/2015	PB
Modified:	01/10/2021	KP

FIBRES PARAMETERS

Optical fibres parameters see **DSH_OFP** document.

MARKING

The following print (white hot stamped, laser or other suitable printing method) is applied at 1-meter intervals:

- Supplier: FIBRAIN
- Standard code (product type, fibre type, fibre count)
- Year of manufacture: xxxx
- Length marking in meters
- Cable ID / Drum No

Example: FIBRAIN DDC-C0 T20 48F - 36F SM G652D 3T12F + 12F SM G652D 3T4F "YEAR OF MANUFACTURE" "LASER SYMBOL" "LENGTH MARKING" "BATCH NUMBER"

The accuracy of marking is $\pm 0,5\%$. Remarkings is in accordance with Bellcore GR 20 and supersedes earlier markings. Occasional loss of marking is possible. Cables can be supplied with a range of single mode or multimode fibres and customized print.

PACKING

Cables will be shipped on disposable wooden or treated wooden drums. Both ends of the cable will be capped and accessible for testing. Identification information will be placed on the drum.

DELIVERY LENGTH

2000 – 8000 meters $\pm 5\%$, with possibility of supplying up to 5% of total contract quantity as short length cables which should be above 1000 meters long. Tolerance of 5 % of order quantity shall be allowed.

ANNEX – DRAWINGS:


6-elements design



8- elements design



12- elements design



24- elements design



*schematic drawing, not to scale

This document and the statements contained in it are not intended for customers within the meaning of the Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot, in any case, be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.