


Type:	BDC-CK	REV: 0
Issued:	15/10/2021	KP
Project:	079-21	

Basic duct cable with multitube structure and glass yarn reinforcement BDC-CK

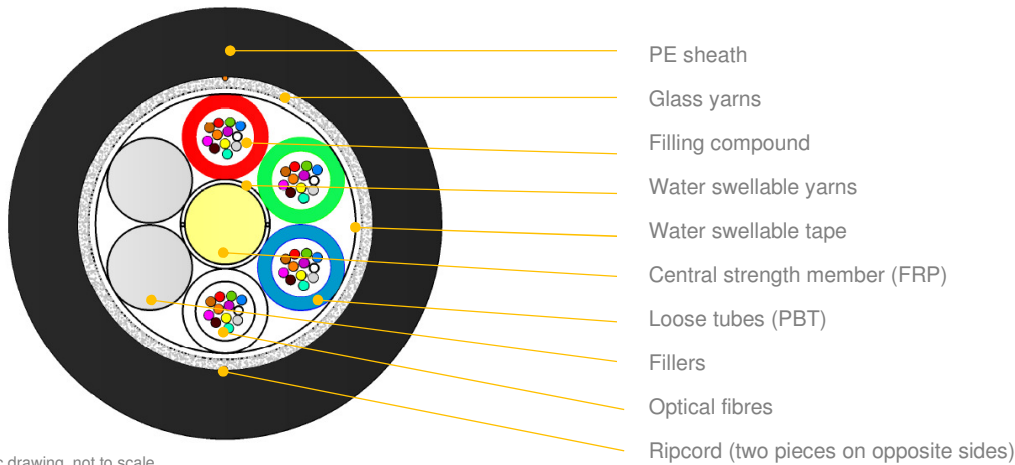

*schematic drawing, not to scale

APPLICATION:

For installation into existing duct
Fully dielectric cable
Light rodent protection

DESIGN:

FRP strength and anti-buckling element
Dry yarns and tape to prevent moisture into the cable
Loose tube (PBT Ø 2.0mm) with filling compound
Optical fibres
Fillers (if applicable)
Water-swellable tape
Fibreglass yarns as strain relief
UV stabilized PE sheath (black by default, other colours available)
Sheath options: LSOH, PA etc.
Nominal outer sheath thickness 1,6mm

CABLE DESIGNS:

Version	Quantity [pcs]				Ø nominal (±5%) [mm]	Nominal weight (±10%) [kg/km]	Max. tensile load short term [N]	Max. tensile load long term [N]
	Fibres	Fibres per tube	Total elements	Active tubes				
1-6T x 12F	12-72	12	6	1-6	10,2	85	4100	2000
Other fibre counts available on demand								

MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

Crush performance:	2000 [N/10 cm]	IEC 60794-1-21-E3, $\Delta\alpha \leq 0,05$ dB, reversible
Bending radius:	Static: 15 x D Dynamic: 20 x D	IEC 60794-1-21-E6, $\Delta\alpha \leq 0,05$ dB, reversible
Water penetration:	3[m] sample, 1[m] head, 24[h]	IEC 60794-1-22-F5, no leakage
Temperature range		IEC 60794-1-22-F1, $\Delta\alpha \leq 0,05$ dB/km
Installation:	-15... +55 [°C]	
Operation:	-40... +70 [°C]	
Transport & Storage:	-40... +70 [°C]	

OPTICAL FIBRE AND LOOSE TUBES COLOUR IDENTIFICATION

For optical fibres and loose tube identification information please see DSH_Colors_CODE_XXXX document.

FIBRE PARAMETERS

For selected post-production optical fibres parameters please see DSH_OFP document.

Type:	BDC-CK	REV: 0
Issued:	15/10/2021	KP
Project:	079-21	

MARKING

The following print (hot stamped / laser printer) is applied at 1-meter intervals:

Example: MIL FO FIBRAIN BDC-CK T20 72F SM G657A1 6T12F "YEAR OF MANUFACTURE" "LASER SYMBOL" "LENGTH MARKING" "BATCH NUMBER"

The accuracy of marking is $\pm 1\%$. Remarking is in accordance with Bellcore GR 20 and supersedes earlier markings. Occasional loss of marking is possible. Cables can be supplied with a range of single mode or multimode fibres and customized print.

PACKING

Cables will be shipped on disposable wooden or treated wooden drums. Both ends of the cable will be capped and accessible for testing. Rotation direction arrow will be marked on the drum together with identification information.

DELIVERY LENGTH

2000 – 8000 meters $\pm 5\%$, with possibility of supplying up to 5% of total contract quantity as short length cables which should be above 1000 meters long. Tolerance of 5 % of order quantity shall be allowed.

This document and the statements contained in it are not intended for customers within the meaning of the Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot, in any case, be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.