


Type:	MDC-FM-FL	REV: 0
Issued:	18/10/2021	KP
Modified:	079-21	

Single HDPE jacket duct cable with Easy Section Modules™ MDC-FM

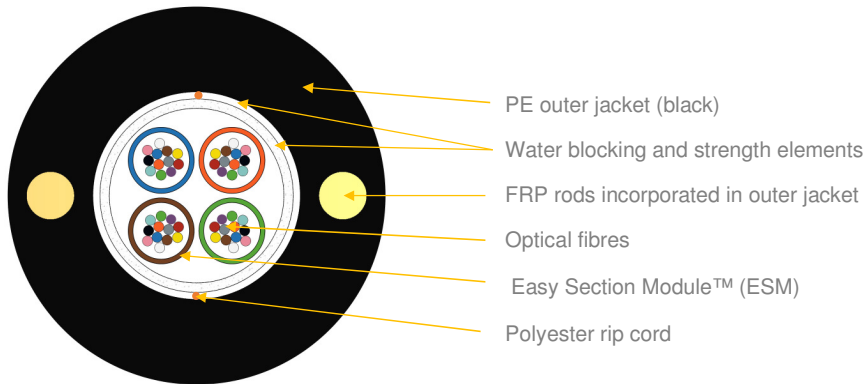

*schematic drawing of 48F configuration, not to scale

APPLICATION:

Duct cable
FTTH access networks
Fully dielectric cable

DESIGN:

1,3mm ESM™ modules with 12 fibres in each module
Filling compound inside ESM™ modules
Water swellable and tensile strength elements
FRP rods as strength and anti-buckling elements
(incorporated in outer jacket)
UV resistant black HDPE sheath
Polyester ripcord

DESIGNS:

Variant	Quantity [pcs]				Ø nominal (typ. ±0,3) [mm]	Nominal weight (±10%) [kg/km]	Max allowed tension [N]	Max static tension [N]	Nominal sheath thickness [mm]
	Fibres	Fibres per module	Total elements	Active modules					
11M x 12F	132	12	11	11	11,2 (max 11,7)	100	2200	1100	2,4

Other variants, designs, mechanical and environmental properties available on demand

MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

Bending performance: 15 x D (10 cycles) IEC 60794-1-2-E6, Δα reversible

Temperature range: IEC 60794-1-2-F1,
Installation -5... +40 [°C]
Operation -30... +60 [°C] Δα≤0,1 dB/km
Transport & Storage -40... +70 [°C] Δα reversible

Test	Specification	Method	Requirements
Tensile strength	IEC60794-1-2 Method E1	Mandrel diameter: ≥ 30 x OD Load: as provided in table above	Fibre strain: < 0.5%(during test) ≤ 0.05%(after test) Δα reversible (after test)
		Mandrel diameter: ≥ 30 x OD Sustained Load: as provided in table above	Fibre strain: ≤ 0.25%
Crush resistance	IEC60794-1-2 Method E3	Load: 2000 N / 10 cm / 5 minutes Plate size: 100 mm x 100mm Number of pts: 3 (500mm apart)	Δα ≤ 0.05dB @ 1550nm (after test) No jacket cracking and fibre breakage
Impact resistance	IEC60794-1-2 Method E4	Impact energy: 5J Radius: 300 mm Distance: 1m No. of impacts: 3 at different points 500mm apart	Δα≤0.1dB @ 1550nm (after test) No jacket cracking and fibre breakage
Torsion	IEC60794-1-2 Method E7	Cable length to be twisted: 1m No. of cycles: 5 Twist angle: ± 180° Load: 50N	Δα≤0.1dB @ 1550nm (after test) No jacket cracking and fibre breakage

Type:	MDC-FM-FL	REV: 0
Issued:	18/10/2021	KP
Modified:	079-21	

Bending	IEC60794-1-2 Method E11	Mandrel radius: 12 x OD / 5 turns (wrapped and unwrapped) / 10 flexing cycles <i>All fibres to be monitored</i>	$\Delta\alpha \leq 0.05\text{dB}$ @ 1550nm (after test) No jacket cracking and fibre breakage
Water penetration	IEC 60794-1-2 Method F5B	Water head: 1m Sample length: 3m (3 samples of each cable) Time: 24 hrs	No water leakage

OPTICAL FIBRES AND MODULES COLOUR IDENTIFICATION

Fibre number	1	2	3	4	5	6	7	8	9	10	11	12
Fibre colour (Couleur des fibres)	Red	Blue	Green	Yellow	Violet	White	Orange	Gray	Brown	Black	Aqua	Pink

MODULES COLOUR CODE FOR CABLES WITH UP TO 12 TUBES

Module number	1	2	3	4	5	6	7	8	9	10	11
Module colour (Couleur des modules)	Blue	Green	Yellow	Violet	White	Orange	Gray	Brown	Black	Aqua	Pink

MODULES COLOUR CODE FOR CABLES WITH UP TO 36 TUBES (WITH ADDITIONAL MARKING, WHICH CAN BE CUSTOMIZED)

FIBRES PARAMETERS

For optical fibres parameters see **DSH_OFP** document.

MARKING

The following print (white / ink jet or hot stamping) is applied at 1-meter intervals:

Example: FREE No URGENCE 01 73 92 26 00 FIBRE LINE 2020 132 FO G.657 A2 "LENGTH MARKING" "BATCH NUMBER"

The accuracy of marking is $\pm 0,5\%$. Remarking is in accordance with Bellcore GR 20 and supersedes earlier markings. Occasional loss of marking is possible. Cables can be supplied with a range of single mode or multimode fibres and customized print.

PACKING

Cables will be shipped on disposable wooden or treated wooden drums. Both ends of the cable will be capped and accessible for testing. Identification information will be placed on the drum.

DELIVERY LENGTH

Cable length on one reel is 4000m $\pm 100\text{m}$. Can be changed upon arrangement and it depends on fibre count.

This document and the statements contained in it are not intended for customers within the meaning of the Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot, in any case, be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.