


## 288 Fibre Blown Cable

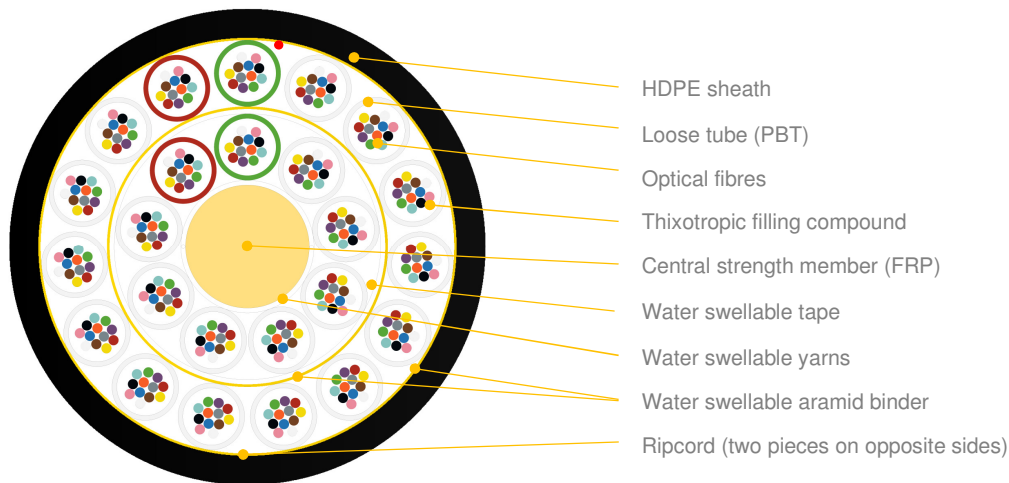

\*schematic drawing, not to scale

### DESIGN:

FRP strength and anti-buckling element  
 Dry yarns to prevent moisture ingress into the cable  
 SZ stranded cable core  
 Loose tubes (PBT Ø 1,4mm) with thixotropic filling compound and ITU-T G.652D or ITU-T G.657A1 optical fibres  
 Yellow PBT fillers (loose tubes with mechanical fibre - when applicable)  
 Water-swellable aramid binder  
 Red polyester ripcords (two pieces on opposite sides)  
 UV stabilized black HDPE sheath (nominal thickness 0,4mm)

Variant	Quantity [pcs]				Ø nominal (±0,2) [mm]	Nominal weight (±5%) [kg/km]	Max allowed tension [N] / ε=0,6%
	Fibres	Fibres per tube	Total elements	Active tubes			
24T x 12F	288	12	24	24	9,3	72	1000

### FIBRES COLOUR CODE

Fibre number	1	2	3	4	5	6	7	8	9	10	11	12
Fibre colour	Blue	Orange	Green	Brown	Grey	Yellow	Red	Violet	White	Black	Aqua	Pink

### TUBES COLOUR CODE

**First tube:** Green    **Other tubes:** Natural  
**Last tube:** Red

\*Sequence repeated on a second layer.

### OPTICAL FIBRES AND LOOSE TUBES COLOUR IDENTIFICATION

For optical fibres and tubes identification information please see **DSH\_Colors\_CODE\_XXXX** document.

### FIBRES PARAMETERS

For selected post-production optical fibres parameters please see **DSH\_OFP** document.

### MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

Temperature range:

Installation: -5... +50 [°C]  
 Operation: -10... +70 [°C]  
 Transport & Storage: -40... +70 [°C]

Cable bending radius:

12 x cable diameter (during operation)  
 20 x cable diameter (during installation)

Test	Specification	Method	Requirements
Tensile strength	IEC60794-1-21 Method E1	<b>Mandrel diameter:</b> $\geq 30 \times OD$ <b>Extended load:</b> 1000N or $\epsilon=0.6\%$ / 15 min <b>Sample Length:</b> 250 m 1 fibre per tube to be spliced on inner and outer layer. Inner and outer layers are being monitored separately and at the same time	<b>Fibre strain:</b> $< 0.6\%$ (during test) $\leq 0.05\%$ (after test) <b>Attenuation increment:</b> $\Delta\alpha \leq 0.05\text{dB @ } 1550\text{nm}$ (after test) No significant damage to fibre unit
Crush resistance	IEC60794-1-21 Method E3	<b>Load:</b> 500 N / 10 cm / 10 minutes <b>Plate size:</b> 100 mm x 100mm <b>Number of pts:</b> 3 (500mm apart) <i>All fibres to be monitored</i>	$\Delta\alpha \leq 0.1\text{dB @ } 1550\text{nm}$ (after test) No jacket cracking and fibre breakage
Impact resistance	IEC60794-1-21 Method E4	<b>Impact energy:</b> 1J <b>Radius:</b> 300 mm <b>Distance:</b> 0.5m <b>No. of impacts:</b> 3 at different points 500mm apart <i>All fibres to be monitored</i>	$\Delta\alpha \leq 0.05\text{dB @ } 1550\text{nm}$ (after test) No jacket cracking and fibre breakage
Torsion	IEC60794-1-21 Method E7	<b>Cable length to be twisted:</b> 2m <b>No. of cycles:</b> 10 <b>Twist angle:</b> starting position to $-180^\circ$ to starting position to $+180^\circ$ , and back ( $\pm 360^\circ$ total) <b>Load:</b> 40N <i>All fibres to be monitored</i>	$\Delta\alpha \leq 0.05\text{dB @ } 1550\text{nm}$ (after test) No jacket cracking and fibre breakage
Bending	IEC60794-1-21 Method E11	<b>Mandrel radius:</b> $20 \times OD / 4$ turns (wrapped and unwrapped) / 3 flexing cycles <i>All fibres to be monitored</i>	$\Delta\alpha \leq 0.05\text{dB @ } 1550\text{nm}$ (after test) No jacket cracking and fibre breakage
Repeated bending	IEC60794-1-21 Method E6	<b>Sheave Radius:</b> $20 \times OD$ <b>No. of cycles:</b> 35 <b>Flexing speed:</b> 15 cycles/minute <b>Load:</b> 40N <i>All fibres to be monitored</i>	$\Delta\alpha \leq 0.05\text{dB @ } 1550\text{nm}$ (after test) No jacket cracking and fibre breakage
Abrasion resistance	IEC60794-1-21 Method E2B (Method 2)	<b>No. of cycles:</b> 30 <b>Load:</b> 4N (PE sheath)	Legend shall remain legible
Water penetration	IEC 60794-1-22 Method F5A, F5B	<b>Water head:</b> 1m <b>Sample length:</b> 1m (3 samples of each cable) <b>Time:</b> 24 hrs	No water leakage
Tube kink	IEC 60794-1-21 Method G7	<b>Length(L1):</b> 350mm <b>Moving length:</b> 100mm/60mm <b>Number of cycles:</b> 5 <b>Number of samples:</b> 5	No tube kink
Ripcord test	IEC 60794-1-21 Method E25	Keeping the test samples 12h @ $-10^\circ\text{C}$ 400mm of the cable sample should be ripped through and the cable core revealed. <b>No. of samples:</b> 3	The rip cord shall rip through the cable sheath and not break for the entirety of the pull
Temperature cycling	IEC 60794-1-22 Method F1	Temperature steps: <b>1 cycle</b> $+23^\circ\text{C} \rightarrow 10^\circ\text{C}(T_{A1}) \rightarrow +60^\circ\text{C}(T_{B1}) \rightarrow +23^\circ\text{C}$ <b>2 cycle (last cycle)</b> $+23^\circ\text{C} \rightarrow 10^\circ\text{C}(T_{A1}) \rightarrow -40^\circ\text{C}(T_{A2}) \rightarrow +60^\circ\text{C}(T_{B1}) \rightarrow +70^\circ\text{C}(T_{B2}) \rightarrow +23^\circ\text{C}$ <b>Soak time:</b> 8h	For $T_{A2}$ and $T_{B2} \leq 0,15\text{dB/km}$ For $T_{A1}$ and $T_{B1} \leq 0,05\text{dB/km}$ Test wavelength: 1550nm

## MARKING

The following print (laser printing or inkjet method) is applied at 1-meter intervals:

“MANUFACTURER’S NAME” “NUMBER OF OPTICAL FIBRES” “FIBRE TYPE” “YEAR/MONTH” “CUSTOMER” “LASER SYMBOL” “LENGTH MARKING” “BATCH NUMBER”

Example: FIBRAIN MKVM-0112 288F SM G657A1 24T12F 2018/08 PROPERTY OF VIRGIN MEDIA “LASER SYMBOL” “LENGTH MARKING” “BATCH NUMBER”

The accuracy of marking is  $\pm 0,5\%$ . Remarking is in accordance with Bellcore GR 20 and supersedes earlier markings. Occasional loss of marking is possible. Cables can be supplied with a range of single mode or multimode fibres and customized print.

Type:	MKVM-0112-24-PE	REV: 0
Issued:	29/09/2021	KP
Project:	079-21	

#### PACKING

Cables will be shipped on disposable wooden or treated wooden drums. Both ends of the cable will be capped and accessible for testing. Rotation direction arrow will be marked on the drum together with identification information.

#### DELIVERY LENGTH

2000 – 8000 meters -0 / +2%, with possibility of supplying up to 5% of total contract quantity as short length cables which should be above 1000 meters long. Tolerance of 5 % of order quantity shall be allowed.

*This document and the statements contained in it are not intended for customers within the meaning of the Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot, in any case, be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.*