


Type:	MAR-FM	REV: 0
Issued:	19/08/2021	KP
Modified:		
Project:	008-21	

Single HDPE jacket outdoor distribution aerial and duct cable with Easy Section Modules™ MAR-FM (modulo 6)

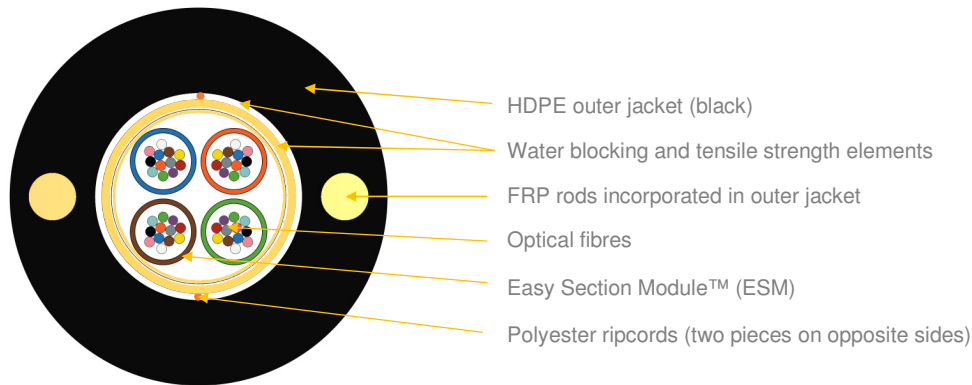

*schematic drawing of 48F configuration, not to scale

APPLICATION

Mixed use duct/aerial
FTTH networks
Fully dielectric
For installation along power lines with an operation voltage below 150 kV and producing space potential below 4 kV.

DESIGN

ESM™ - Easy Section Module with 6 fibres each, 1,0mm.
Water blocking aramid yarns as a strain relief
Water swellable elements
FRP rods as strength and anti-buckling elements
UV resistant black HDPE sheath
Polyester ripcord, two pieces on opposite sides

VARIANTS

Variant	Quantity [pcs]				Ø nominal (±0,5) [mm]	Nominal weight (±10%) [kg/km]	Max allowed tension MAT / T _M [N]	Max operating tension MOT / T _L [N]	Max installation tension MIT [N]
	Fibres	Fibres per module	Total elements	Active modules					
1M x 6F	6	6	1	1	5,9	29	600	170	145
2M x 6F	12	6	2	2	7,2	38	800	220	190
4M x 6F	24	6	4	4	8,0	45	950	270	220
6M x 6F	36	6	6	6	8,5	48	1000	300	240
8M x 6F	48	6	8	8	10,2	70	1450	400	350
12M x 6F	72	6	12	12	11,5	95	2000	600	530
16M x 6F	96	6	16	16	11,5	101	2100	650	560
24M x 6F	144	6	24	24	13,5	127	2650	800	750

MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

Test	Specification	Method	Requirements
Tensile strength	IEC60794-1-21 Method E1	Mandrel diameter: ≥ 30 x OD Load T _M : as provided in the table above	Fibre strain: e ≤ 0.3%, during test, reversible Cable strain: e ≤ 0.5%, during test, reversible Δα ≤ 0,5dB/km, during test, reversible
		Mandrel diameter: ≥ 30 x OD Sustained Load T _L : as provided in the table above	Fibre strain: e ≤ 0.1%, no attenuation change
Crush resistance	IEC60794-1-21 Method E3	Load: 2000 N / 10 cm / 15 minutes Plate size: 100 mm x 100mm Number of pts: at 5 different points 200mm apart	Δα ≤ 0.1dB @ 1550nm, during test, reversible No jacket cracking and fibre breakage
		Load: 3000 N / 10 cm / 15 minutes Plate size: 100 mm x 100mm Number of pts: at 5 different points 200mm apart	Δα reversible, No jacket cracking and fibre breakage

Type:	MAR-FM	REV: 0
Issued:	19/08/2021	KP
Modified:		
Project:	008-21	

Impact resistance	IEC60794-1-21 Method E4	Impact energy: 5J Striking surface radius: 10 mm No. of impacts: at 3 different points 200mm apart	$\Delta\alpha$ reversible, No jacket cracking and fibre breakage
Torsion	IEC60794-1-21 Method E7	Cable length to be twisted: 1m No. of cycles: 20 Twist angle: $\pm 180^\circ$	$\Delta\alpha \leq 0.1\text{dB}$ @ 1550nm, during test, reversible No jacket cracking and fibre breakage
Cable kink	IEC60794-1-21 Method E10	Loop diameter: 10 x OD	No cable kink
Repeated bending	IEC60794-1-21 Method E6	Mandrel radius: 20x OD No. of cycles: 20	No jacket cracking and fibre breakage
Bending	IEC60794-1-21 Method E11	Mandrel radius: 15 x OD / 5 turns (wrapped and unwrapped) No. of cycles: 10	$\Delta\alpha \leq 0.1\text{dB}$ @ 1550nm, during test No jacket cracking and fibre breakage
Water penetration	IEC 60794-1-22 Method F5B	Water head: 1m Sample length: 3m Number of samples: 10 pcs Time: 168 hrs	No water leakage for 9 out of 10 samples
Temperature range	IEC 60794-1-22 Method F1	Operation: Storage: -40... +70 [°C] Transport:	$\Delta\alpha \leq 0,1 \text{ dB/km}$ @1550nm, during test, reversible

(*) values for single-mode fibres, all optical measurements performed at 1550nm

SUGGESTED MAXIMUM SPAN VALUES CALCULATED FOR THE SPECIFIED CABLE STRAIN AND MIT LIMIT

Suggested max span [m]	Fibre count / modulo 6							
	6F	12F	24F	36F	48F	72F	96F	144F
Loading conditions (Sag 2,0%)								
NESC heavy	29	31	36	36	44	55	55	65
NESC medium	59	61	65	65	80	80	80	80
NESC light	75	80	80	80	80	80	80	80

OPTICAL FIBRE AND MODULES COLOUR IDENTIFICATION

For optical fibres and modules identification information please see DSH_Colors_CODE_XXXX document.

FIBRE PARAMETERS

For selected post-production optical fibres parameters please see DSH_OFPP document.

MARKING

The following print (hot stamped, laser or other suitable printing method) is applied at 1-meter intervals:

- Supplier: FIBRAIN
- Standard code (product type, fibre type, fibre count)
- Year of manufacture: xxxx
- Length marking in meters
- Cable ID / Drum No

Example: FIBRAIN MAR-FM 48F SM G657A2 8M6F "YEAR OF MANUFACTURE" "LASER SYMBOL" "LENGTH MARKING" "BATCH NUMBER"

The accuracy of marking is $\pm 0,5\%$. Remarking is in accordance with Bellcore GR 20 and supersedes earlier markings. Occasional loss of marking is possible. Cables can be supplied with a range of single mode or multimode fibres and customized print.

PACKING

Cables will be shipped on disposable wooden or treated wooden drums. Both ends of the cable will be capped and accessible for testing. Identification information will be placed on the drum.

DELIVERY LENGTH

2000 – 8000 meters $\pm 5\%$, with possibility of supplying up to 5% of total contract quantity as short length cables which should be above 1000 meters long. Tolerance of 5 % of order quantity shall be allowed.

This document and the statements contained in it are not intended for customers within the meaning of the Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot, in any case, be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.